


Rectangular Gimbal Shoplight Colour Change

Powerful, versatile and energy efficient.

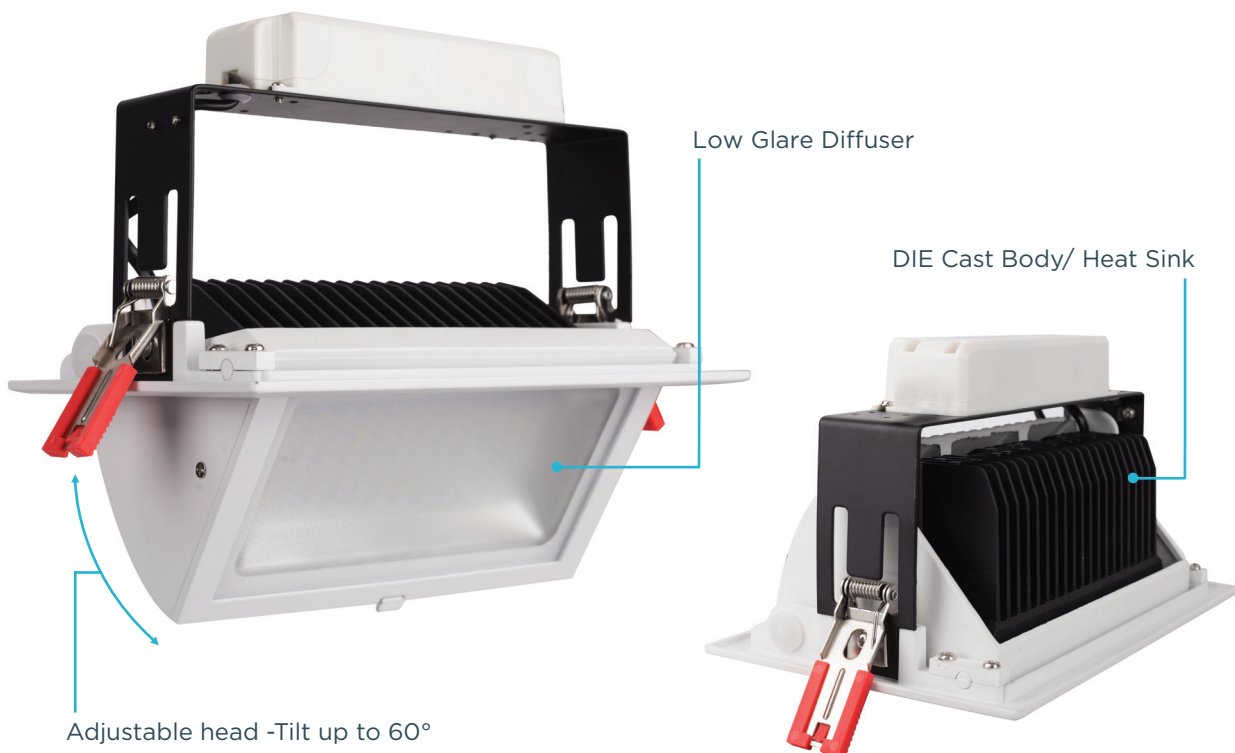

PRODUCT FEATURES

- High efficacy LED (LM-80-08 Certified) chips
- Replacement for 70W/150W MH in 20W & 38W
- Light-weight, die-cast aluminium body
- Thermoplastic PC diffuser
- Three CCT change options - 3000K, 4000K, 5000K
- Flex and Plug pre-wired
- Adjustable head -Tilt up to 60°
- Retrofit into most common ceiling cut-out holes 230mm X 125-130mm

CUSTOMER BENEFITS











- Tilt head to focus the area as required
- Bright yet comfortable ambience or task light
- Significant reduction in energy consumption
- No replacement lamp or maintenance costs
- Long operating life

CONTRACTOR BENEFITS

- Quick and easy installation with flex & plug pre-wired
- Easy retro-fit into standard and oversize cut-out holes in ceilings
- Light Weight for easy handling and installation





SPECIFICATIONS

Power Factor	Colour Temperature	Luminous Efficacy	Beam Angle	Temperature Range	Operating Humidity	Ingress Protection	Colour Rendering	Operating Life	Colour Change
 0.9	 3000k 4000k 5000k	 ~120lm/W	 120°	 -20°C 50°C	 <95%	 IP20	 Ra85	 50,000	

Model	Lumen	Nominal Power	Size (mm)	Cut-out (mm)	CCT Options
OPT-OB RGS2-20W-CC	2400	20W	240 x 145 x 135	227 x 130	3000K/4000K/5000K Colour Change - Switchable
OPT-OB RGS2-38W-CC	4560	38W			

† Switchable CCT with in-line switch

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

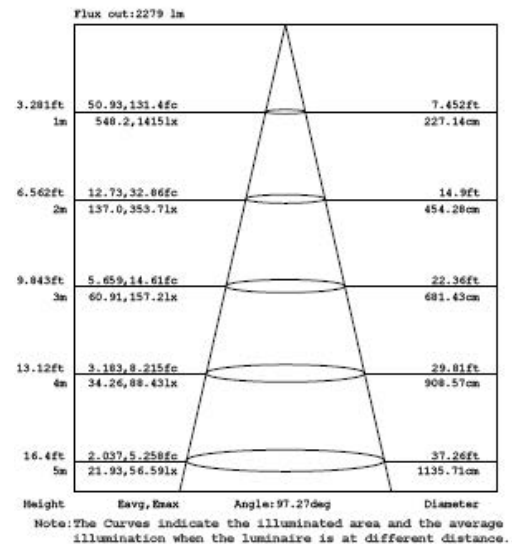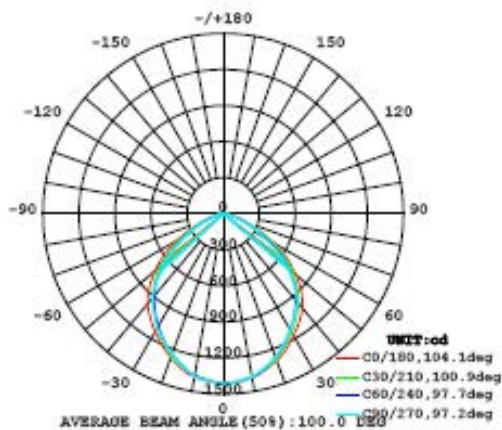

Typical Light Distribution diagram for 20W model